


FUTURA LIGHTING

Futura LED Under Cabinet Lights

Prod. Names: FL-1204 & FL-1207 Series

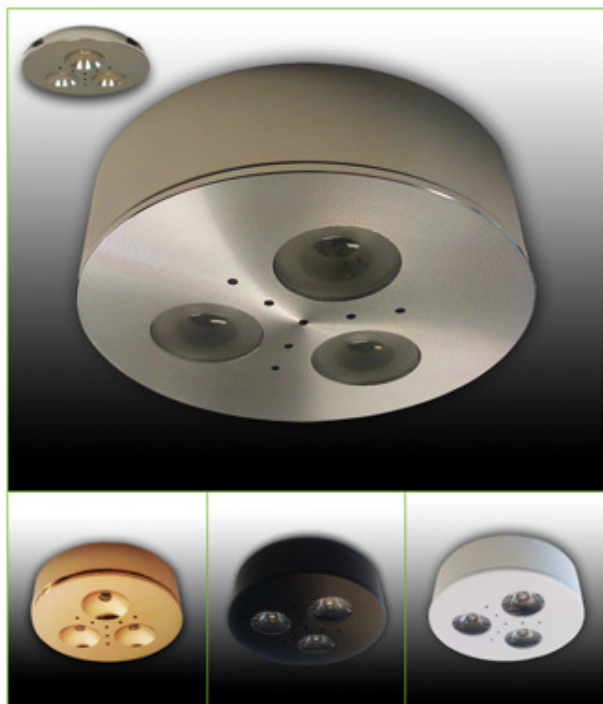

Features:

Long Lifetime: > 50,000 hours
Energy Conservation: Save 80% more energy compared with traditional lighting fixtures
Lumen maintenance: 70% at 30,000 hrs.
Surface mounted: With small screws
Wattage: 3 watts CREE or Edison LED
Wire length: 3 feet
Connector: AMP
Mounting: Recessed or surface
Dimmable: Yes

Ref. Name & Colors:

Ref. Name: FL-1204 (12VDC)
FL-1204 01ED WW (Black Finish / Edison Warm White)
FL-1204 02ED WW (White Finish / Edison Warm White)
FL-1204 05ED WW (Brushed Chrome Finish / Edison Warm White)
FL-1204 05ED W (Brush Chrome Finish / Edison Cool White)
FL-1204 03 WW (Gold Finish / CREE Warm White)
FL-1204 04 WW (Chrome Finish / CREE Warm White)
FL-1204 05 WW (Brushed Chrome Finish / CREE Warm White)
FL-1204 05 W (Brushed Chrome Finish / CREE Cool White)

Dimensions: DIA: 2.34 in. | H: 1/2 in. | Cutout: 2 1/2 in.

Compatible LED Drivers:

LED-10W-12VDC	(10W, Input 120V 50/60Hz, Output 12VDC Non-Dimmable)
LED-25W-12VDC	(25W, Input 85-277V 50/60Hz, Output 12VDC Non-Dimmable)
LED-60W-12VDC	(60W, Input 100-277V 60 Hz, Output 12VDC Non-Dimmable)
LED-100W 12VDC	(100W, Input 120-277V 50/60Hz, Output 12VDC Waterproof Non-Dimmable)
FL-36W-LED-6B	(36W, Input 100-240V 50/60Hz, Output 12VDC Non-Dimmable w/ 6-Light Distribution Box)
LED-12W-12V-DIM*	(12W, Input 120V 50/60Hz, Output 12VDC Dimmable)
LED-26W-12V-DIM**	(26W, Input 120V 50/60Hz, Output 12VDC Dimmable)
LED-48W-12V-DIM***	(48W, Input 120V 50/60Hz, Output 12VDC Dimmable)
FL-36W-12V-LED-DIM	(36W, Input 120V 50/60Hz, Output 12VDC Dimmable)
FL-50W-12V-LED-DIM****	(50W, Input 120V 50/60Hz, Output 12VDC Dimmable)
FL-60W-12V-LED-DIM	(60W, Input 120V 50/60Hz, Output 12VDC Dimmable)

New small-sized dimensions: (LxWxH) *2.56" x 1.62" x 0.75" | **6.68" x 1.87" x 1" | ***4.81" x 3.13" x 1.31" | ****6" x 2" x 1.3/8"



Features:

Tap Body to Turn On/Off, Non-Dimmable
Energy Conservation: Save 80% more energy compared with traditional lighting fixtures
Lumen maintenance: 70% at 30,000 hrs.
Surface mounted: With 3M Foam Tape
Wattage: 2 watts output equal to 10W halogen
Wire length: 16 inches
Warm White: 3000°K | **Cool White:** 6000°K

Ref. Name & Colors:

Ref. Name: FL-1207 (10-30VDC)
FL-1207 02 WW (White Body, White White LED)
FL-1207 02 W (White Body, Cool White LED)
FL-1207 05 WW (Silver Body, Warm White LED)
FL-1207 05 W (Silver Body, Cool White)

With built-in constant voltage LED circuit board, powered by 10-30VDC
Adopts 24-SMD NICHIA LED and a plastic front lens matte

Compatible LED Drivers:

LED-10W-12VDC	(10W, Input 120V 50/60Hz, Output 12VDC Non-Dimmable)
LED-25W-12VDC	(25W, Input 85-277V 50/60Hz, Output 12VDC Non-Dimmable)
LED-60W-12VDC	(60W, Input 100-277V 60 Hz, Output 12VDC Non-Dimmable)
LED-100W 12VDC	(100W, Input 120-277V 50/60Hz, Output 12VDC Waterproof Non-Dimmable)
FL-60W-LED-PLUGIN	(60W, Input 100-240V 50/60Hz, Output 12VDC Non-Dimmable)
FL-1206T	(60W, Input 120V-240V 50/60Hz, Output 12VDC Waterproof Non-Dimmable)
FL-1210W	(100W, Input 120V-240V 50/60Hz, Output 12VDC Waterproof Non-Dimmable)
FL-1220W	(200W, Input 120V-240V 50/60Hz, Output 12VDC Waterproof Non-Dimmable)
LED-12W-12V-DIM*	(12W, Input 120V 50/60Hz, Output 12VDC Dimmable)
LED-26W-12V-DIM**	(26W, Input 120V 50/60Hz, Output 12VDC Dimmable)
FL-35W-12V-LED-DIM***	(35W, Input 120V 50/60Hz, Output 12VDC Dimmable)
LED-48W-12V-DIM****	(48W, Input 120V 50/60Hz, Output 12VDC Dimmable)

New small-sized dimensions: (LxWxH) *2.56" x 1.62" x 0.75" | **6.68" x 1.87" x 1" | ***6" x 2" x 1.3/8" | ****4.81" x 3.13" x 1.31"